

LKS-5M-150-180W

Mechanical data:

Solar cells array: 36 (4X9)

Junction box: solar junction box, IP67,
2 bypass diode

Output cable: 4.0MM² ,cable length as
standard+mc4connector

Single glass: 3.2mm tempered glass






Frame: aluminum frame

Weight: 11KG/12KG

Dimension: 1480 x 680 x 35mm

Packing: 2Pcs/carton, paper carton

Remarks: fully customized acceptable

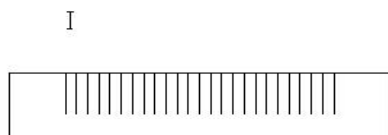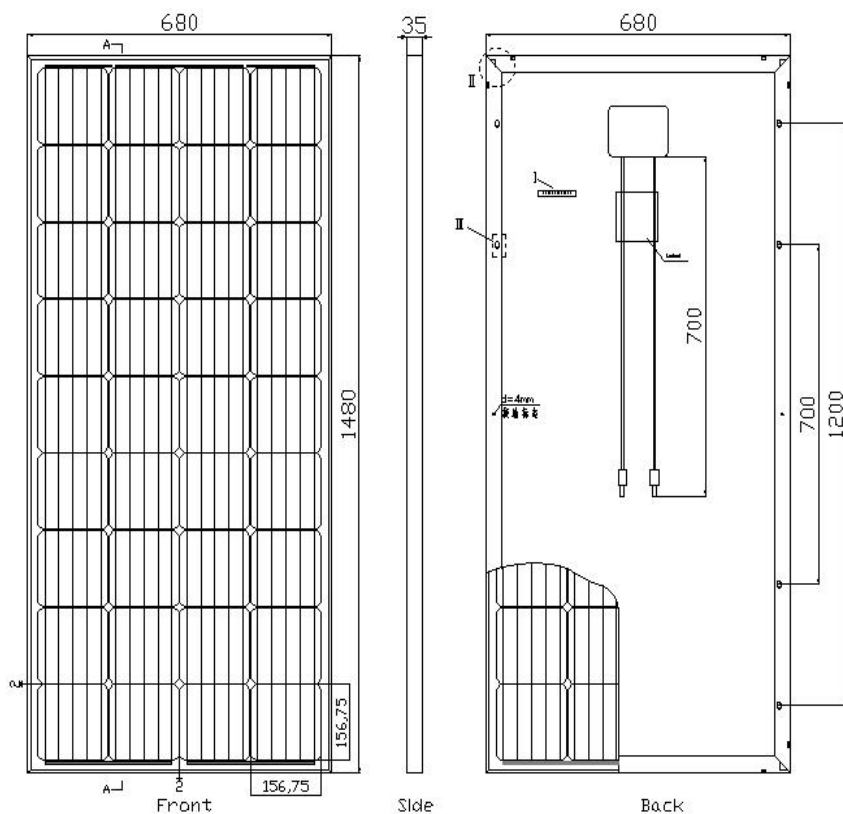

A smart design for the light and portable solar modules, which could be easily used in tiny area, such as yard lighting, room decoration, camping, fishing, sight seeing and so on, where there is need of small quantity power supply, there will be our products could be found. No matter where you are, only with sunlight, you will get power, the endless power.

Electrical data: STC: AM1.5 1000/m² 25C° peak power testing tolerance ±3%

Pmax/W	150	155	160	165	170	175	180
Voc/V	21.8	21.8	21.8	21.8	21.8	21.8	21.8
Isc/A	8.92	9.21	9.51	9.80	10.1	10.4	10.7
Vmp/V	18.2	18.2	18.2	18.2	18.2	18.2	18.2
Imp/A	8.25	8.52	8.80	9.07	9.35	9.62	9.90
Eff. (%)	15	15.5	15.9	16.4	16.9	17.4	17.9