




I'M SOLAR INVERTER HPT

Three phases 2MPTTS 3-11T

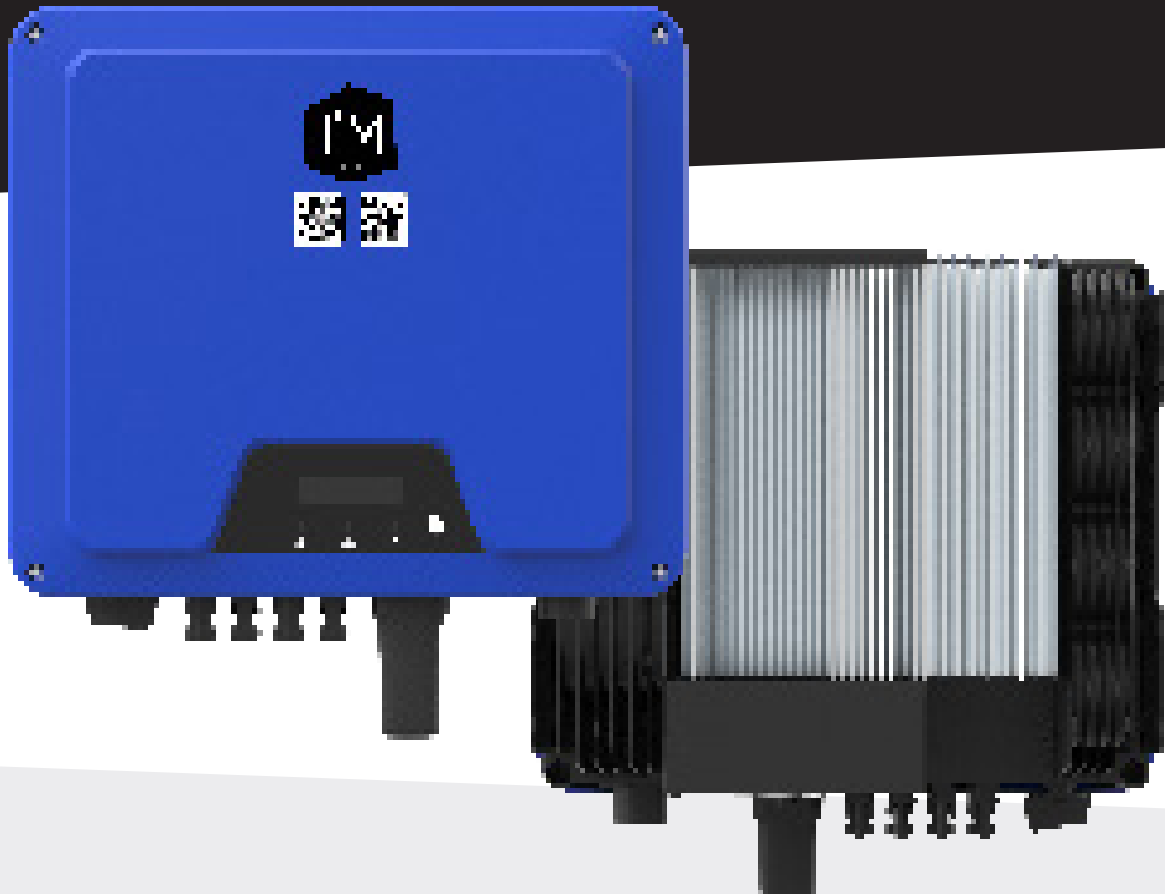

Peak efficiency **98.6%**




Easy to install and service



Max D.C. Overland **50%**



Pilote your home consumption

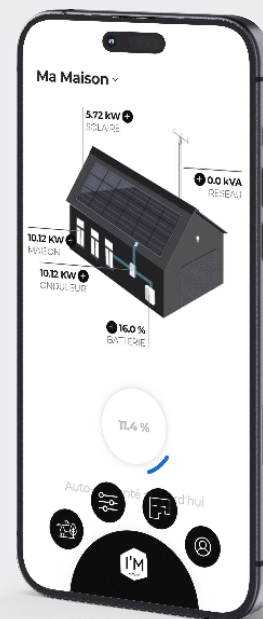

TECHNICAL DATA

MODEL	HPT-15K	HPT-17K	HPT-20K	HPT-25K
INPUT / DC				
Max. PV Power/Wp	22500	25500	30000	32500
Max. Input Voltage/V	1000			
MPP Voltage Range/V	150-900			
Min. DC Voltage/ Start Up Voltage/V	150/180			
Full Load MPP Voltage Range/V	330-900	380-900	430-900	500-900
Nominal DC-Input Voltage/V	620			
Max. Input Current/A	26/26			
Max. DC Short Circuit Current/A	40/40			
No. of Independent MPPT Inputs	2			
No. of PV Strings per MPPT	2			
OUTPUT /AC				
Rated Power/ W	15000	17000	20000	25000
Max. Apparent AC Power/ VA	16500	19000	22000	27500
Rated Grid Voltage/ Vac	380/400			
Grid Connection	3 / 3L-N-PE			
Rated Power Frequency / Hz	50/60			
Max. Output Current / A	24	27.6	31.9	36.3
Power Factor	0.8ind to 0.8cap			
THDi@ Rated Power	<3%			
EFFICIENCY				
Max. Efficiency	98.6%			
Euro. Efficiency	98.2%			
PROTECTION FUNCTION				
Anti-Islanding Protection	Integrated			
Input Reverse Polarity Protection	Integrated			
Insulation Resistance Detection	Integrated			
Residual Current Monitoring	Integrated			
Output Over Current Protection	Integrated			
Output Short Circuit Protection	Integrated			
Over Voltage Protection	Il (DC), Ill (AC)			
Surge Protection	DC: Optional / AC: Type II			

TECHNICAL DATA

MODEL	HPT-15K	HPT-17K	HPT-20K	HPT-25K
GENERAL DATA				
Dimensions (W'WD) / mm	425•351•200			
Weight/ kg	20			
Noise Emission (Typical) / dB(A)	<45			
User Interface	LCD&LED or LED			
DC Connection Type	MC4 (D4, SUNCLIX, H4 optional)			
AC Connection Type	Plug-in Connector			
Communication	RS485/WiFi/GPRS (optional)			
Cooling Method	Smart Fan Cooling			
Operating Ambient Temperature/C'	-25-+60			
Relative Humidity	0%to100%			
Max.Operating Altitude/m	2000 (>2000 Derating)			
Protection Class (IEC 60529)	IP65			
Climatic Category (IEC 60721-3-4)	4K4H			
Topology	Transformerless			
Factory location	by Hypo in PRC			
Night Consumption / W	<1			

I'M SAFE® WARRANTY

You are 2 times more protected



The Serenity guarantee

The Serenity Guarantee protects you against all mechanical, meteorological, fire and theft risks. All I'M.SOLAR® inverters are covered by this insurance for 5 years. You can rest assured that you are covered against any unforeseen and sudden damage to your equipment.



The Quality guarantee

All I'M.SOLAR® inverters come with a manufacturer's warranty. This manufacturer's guarantee covers all manufacturing defects, quality defects and operating faults for a specific period. The manufacturer's guarantee is 10 years.