




Available For Severe Weather Area /
Corrosion Resistance / Easy Installation / CE Certified




Available For Severe



Anti-Corrosion
Performance



Easy Installation



CE Certified



GP-2S

TECHNICAL DATA

| Aluminum Ground System GP-2S | |
|------------------------------------|---|
| Application Ground / Open Field | Foundation Type Fastened with Ground Screw Anchored into Concrete Block |
| Module Frame Height 25-50mm | Module Orientation Portrait, Landscape |
| Tilt Angles 0 – 60deg | Ground Clearance ≤3000mm |
| Material | Aluminium EN AW-6005 T5 With 12-15um Anodization For Anti-Corrosion Fasteners A2 Quality Stainless Steel 304/410 Q235 Hot dip galvanized |
| Standard | Japan JIS C 8955:2011 ASCE 7-10 Malaysian Standard 1553-2002 BS EN 1991-1-4-2005 |




YEARS
12
WARRANTY



YEARS
25
SERVICE LIFE

Application:

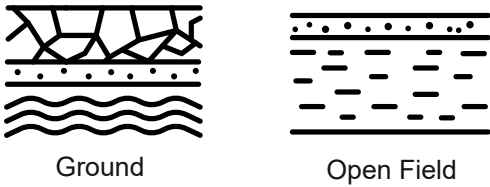

GROUNDING PARTS

Grounding Lug



YS-GL-Y : For electricity conductive.





Grounding Washer

YS-GW-05: Pierce anodization coating through its teeth for electricity conductive.





TOOLS





6mm 8mm

TO KNOW MORE +

www.yuen-s.com



 sales@yuen-s.com

 +86 592 5231969

End Clamp Kit
YS-EC1-35Y
For different module frame heights
Mill finished or black
Pre-assembled



Mid Clamp Kit
YS-MC1-35Y
For different module frame heights
Mill finished or black
Pre-assembled




Rail
YS-209
Rail in various lengths



Fixing Clamp Kit
YS-FC-01Y
Fix rail to the support frame.



Structure Details

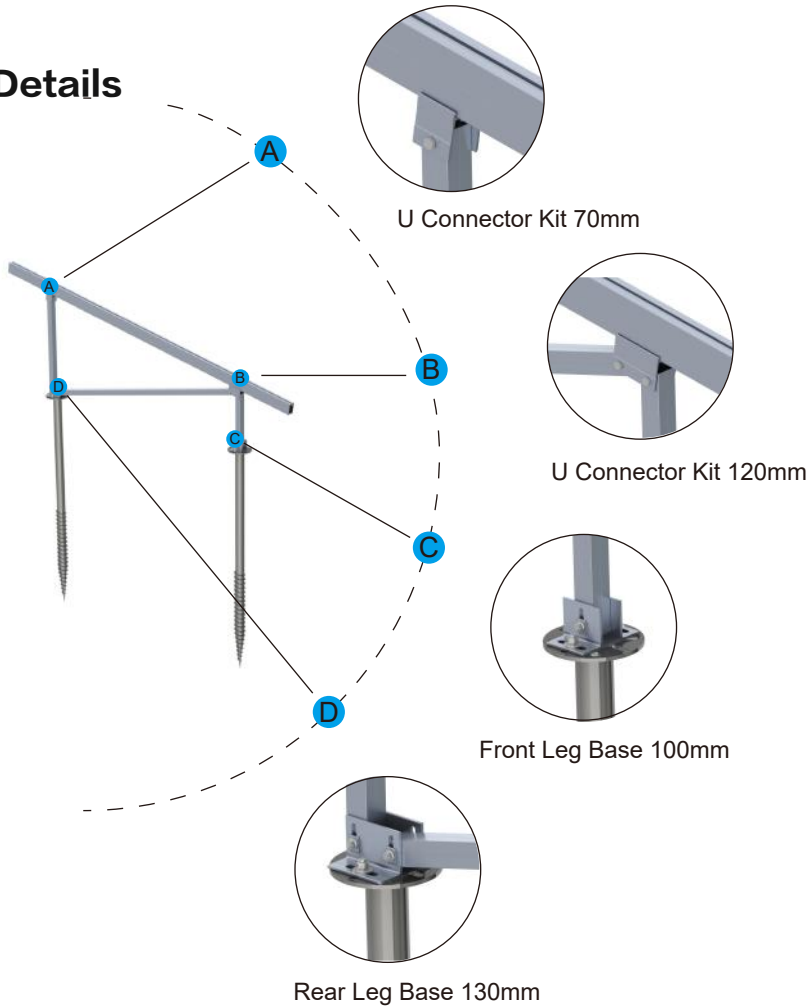

Features






A Type: Ground Clearance ≤ 300mm



N Type: Ground Clearance ≥ 600mm



W Type: Severe Weather Area

| Configuration | Array |
|---------------|---|
| 2 Portrait |  |
| 3 Landscape |  |
| 4 Landscape |  |