



ASPEN WOODS
GROUP INC. —



The Rob Rockefeller S.C.

3MW BESS SYSTEM

RESILIENT, RELIABLE, AND QUICK DELIVERY
LIQUID COOLING ENERGY STATION

Commercial Battery System 20AWG3MW



Commercial Battery System, a high-performance, all-in-one, containerized battery energy storage system developed by Aspen Woods Group INC, provides C&I users with the intelligent and reliable solution to optimize energy efficiency and resilience. As the leading BESS product, Commercial Battery System is certified by UL1973, UL9540A, IEC62619, CE, UN38.3, provides secure, reliable and safe power supply.

Commercial Battery System - 20AWG3MW, with capacity of 2,752kWh@20ft, is ideal for mostly utility and C&I applications, such as renewable energy power plant supplement, factories, buildings, etc. The integrated and easy-to-install BESS can be easily connected and matched with the equipment, while the advanced BMS and cloud-based operation platforms bring superior interaction experience for users.




Application Areas

- Smooth New Energy Output
- Voltage, Frequency Support, Frequency Modulation
- Peak Valley Arbitrage
- Demand Management
- Construction of Microgrid



System Topology

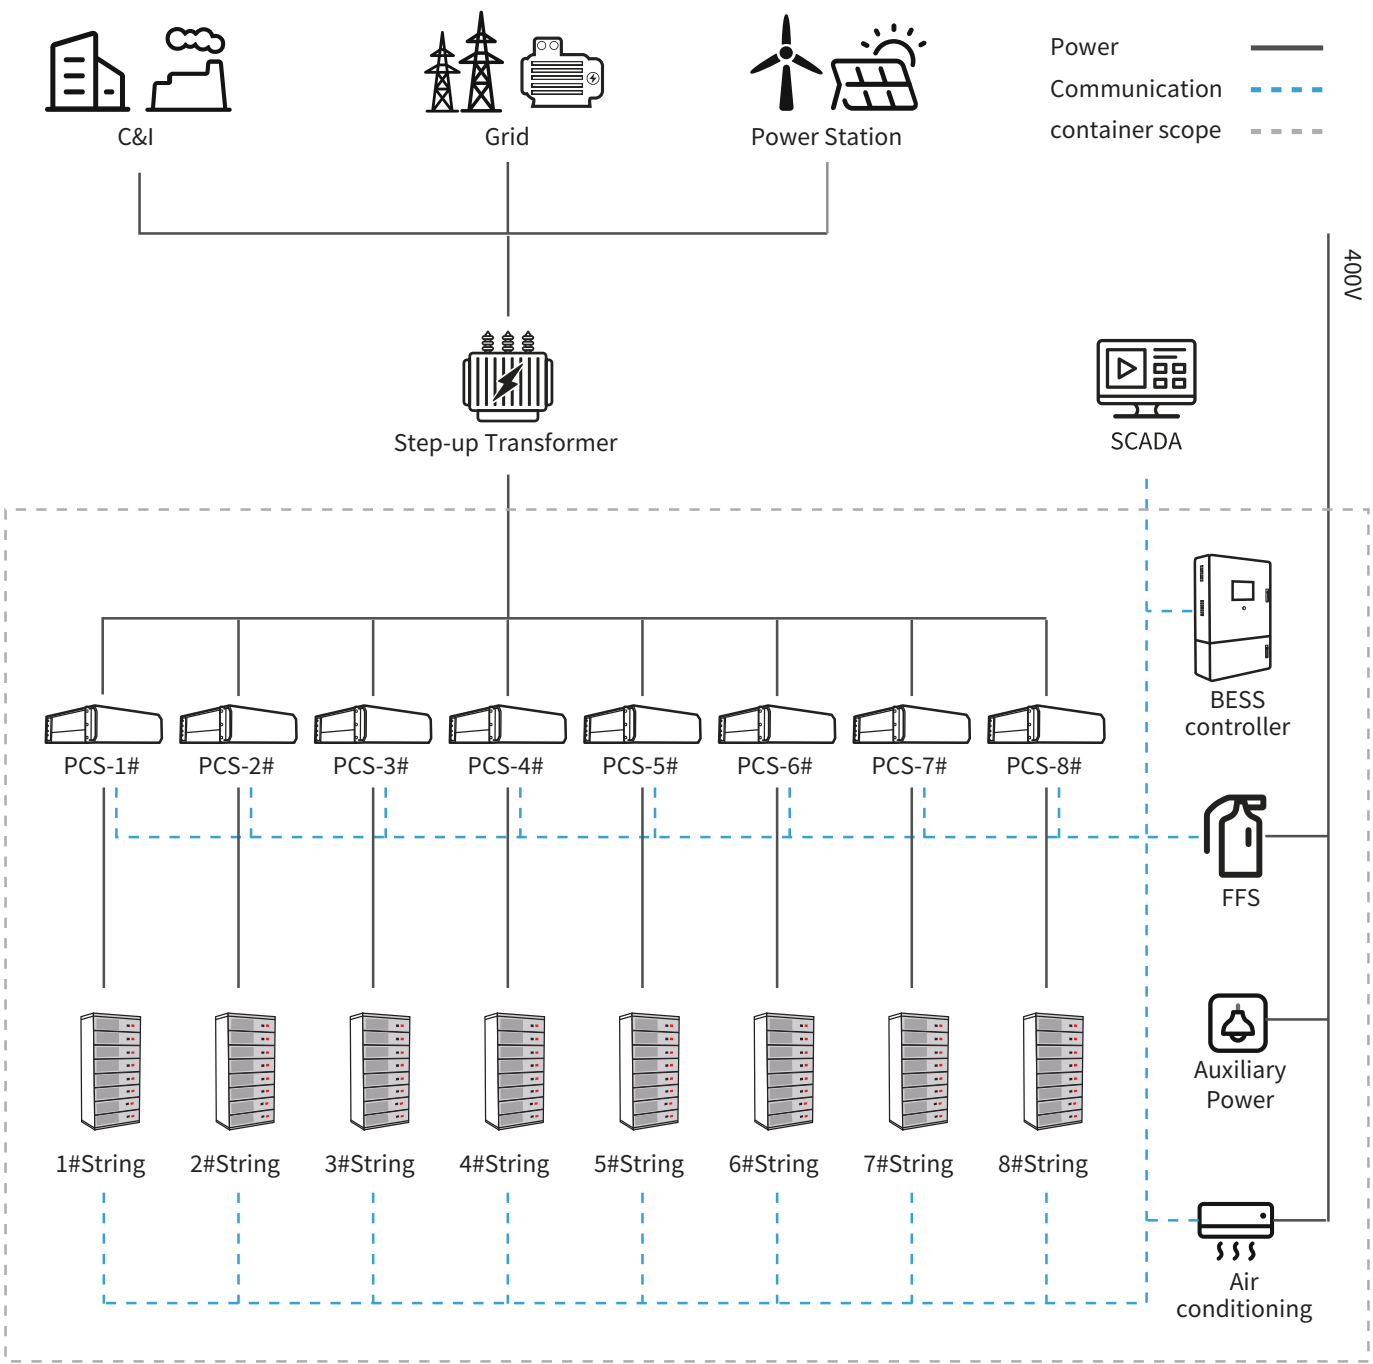

More Energy	All-in-one Design	Simple O&M	Safe & Reliable
Pack-level Optimization String-level Optimization	AC/DC All-in-one Design Reducing Initial Investment	No periodic balancing No experts site visit	Modular Design High Availability

Product Layout



Product Configuration

Product Model	Battery String Type	String Qty	Nominal Capacity	DC Voltage Range	Grid-connected voltage	Dimensions (WxDxH mm)
20AWG3MW	LS344	8	2,752kWh	1075.2V~1363.2V	690V	6,058 x 2,438 x 2,896
20AWG3MW(DC)	LS344	10	3,440kWh	1,075.2V~1,363.2V	690V	6,058 x 2,438 x 2,896

System Technical Specifications

Item	20AWG3MW
DC Data	
Battery chemistry	Lithium Iron Phosphate (LFP)
Cell life cycle	80% Retention with 6,000 Cycles @ 0.5C 25°C
Cell spec	3.2V/280Ah
String configuration	1P384S
Number of strings	8
DC rated energy capacity	2,752kWh
Rated voltage	1,228.8V
Voltage range	1,075.2V~1,363.2V
BMS communication interface	RS485, Ethernet
BMS communication protocol	Modbus RTU, Modbus TCP
AC Data	
Rated AC Power	1,600kW
Maximum AC power	1,760kW
Rated voltage	690V
Grid voltage range	586.5~759V(Optional)
AC rate of current	1,339.2A
Output THDi	<3%
AC PF	-1~+1
AC output	3W+PE
General Data	
Dimension w/o clearances (L*W*H)	6,058x2,438x2,896mm
Weight of the whole system	28.5t
Degree of protection	IP54
Operating temperature range	-20~50°C(Max.-30~55°C)
Relative humidity	0~95% (non-condensing)
Max working altitude	3,000m/9,842feet(non-derating)
Cooling concept of DC hatch	Liquid Cooling
Fire fighting system	FK-5-1-12(NOVEC1230)
Communication interfaces	RS485, Ethernet
Certificates	UL9540, DNV Bankability, UN3536

Key Components



- 0.5C Charge/Discharge;
- Power supply can be single battery string or parallel battery strings;
- Easy configuration and maintenance.

Battery String-LS344

Item	Data
Battery module	LS344
Pack QTY	8
Rated capacity	344.06kWh
Rated voltage	1,228.8V
DC voltage range	1,075.2V~1,363.2V
Pack	153.6V/280Ah@1P48S
Communication	Ethernet, CAN, RS485
Lifespan	>6,000 cycles@0.5C, 25°C
Dimensions (W×D×H)	862×1,100×2,228mm
Weight	2,540kg
Certifications	UL1973, UL9540A, IEC62619, CE , UN38.3



- Single-stage three-level modularization; Multi-branch input to reduce battery
- series and parallels connection; One-to-one Management of Battery
- string and PCS.

Power Conversion System

Item	Data
DC voltage range	1000~1,500V
Maximum DC current	224.5A * 8
Rated output power	200kW * 8
Rated grid voltage	690V, 3W+PE
Grid voltage range	586.5~759V(Optional)
Grid frequency	50Hz/60Hz
Max AC current	184.1A * 8
AC PF	-1~+1
Weight	100kg * 8
Certifications	UL 1741, IEEE 1547, IEC62477-1, IEC 61000




- All-round signal collection;
- Comprehensive logical control;
- Multilevel electric & control protection;
- Intelligentize Communication management ;
- Simple Configuration.

GridPoint Controller(GPC)

	Data
Power interface	AC400V/DC24V
Communication	Modbus RTU、Modbus TCP
Relay	24 stem node input / output
Grid control application	Time-of-use, Peak shaving, Renewable smoothing

BMS with Real-time Passive Balance

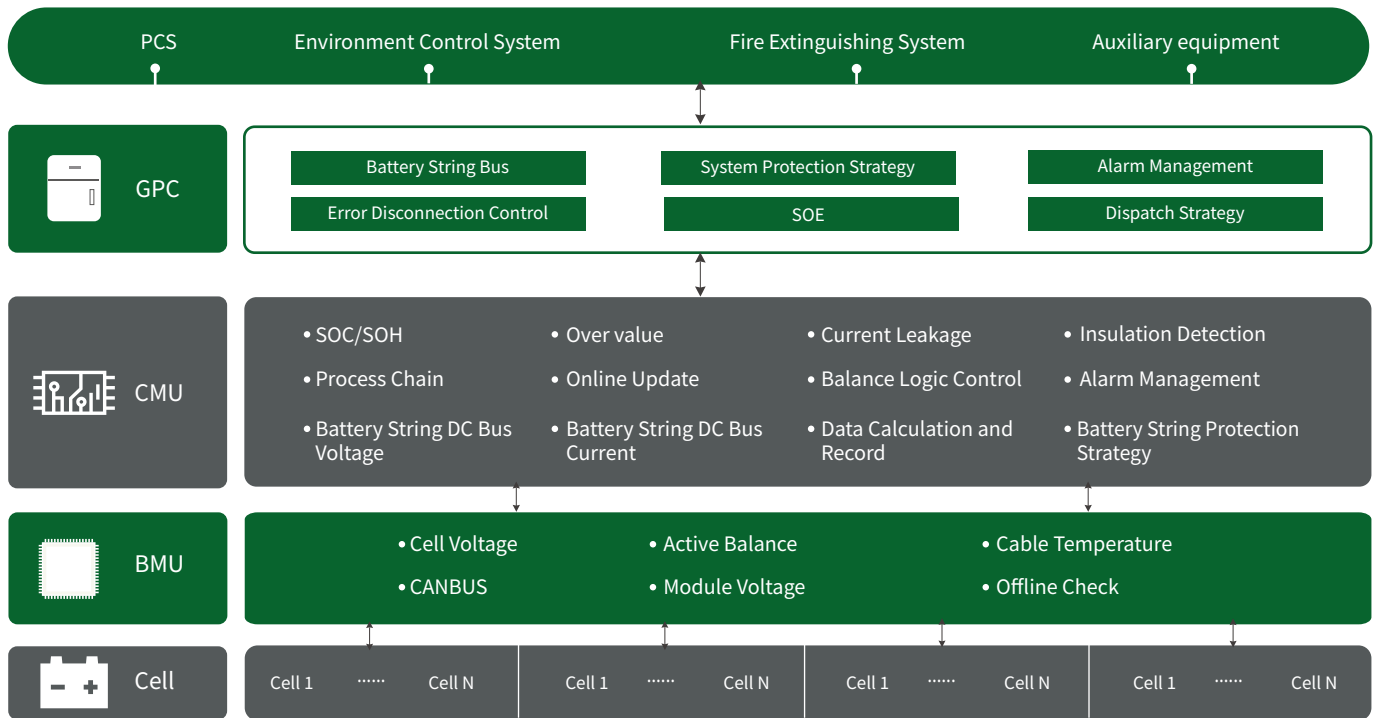

BMU		CMU	
Cell Voltage Measurement Accuracy	±2.5 mV	Battery String Voltage Measurement Range	100~1,500V
Cell Voltage Monitoring Interval	≤500ms	Battery String Voltage Measurement Accuracy	±1%
Cell Temperature Measurement Accuracy	±2°C	Battery String Voltage Monitoring Interval	≤200ms
Cell Temperature Measurement Interval	≤3s	Battery String Current Measurement Range	±300A
Cell Current Balance	Active Balance, 5A MAX	Battery String Current Measurement Accuracy	≤1%
Cell Voltage Measurement Range	1~5 V	Battery String Current Monitoring Interval	≤50ms
Over-current Protection	250A/1s	SOC Calculation Accuracy	≤8%
Short-Circuit Protection	500A/10ms	Input Insulation Resistance	≥10MΩ, 1,000VDC



ASPEN WOODS
GROUP INC. —




The Rob Rockefeller S.C.

GET IN TOUCH

5700 TENNYSON PARKWAY, SUITE 300
PLANO, TX, 75024
INFO@AWGROUPINC.COM
WWW.AWGROUPINC.COM

 /ASPENWOODSGROUPINC

 /ASPENWOODSGROUP