


DS-A36-130 Panels Specifications

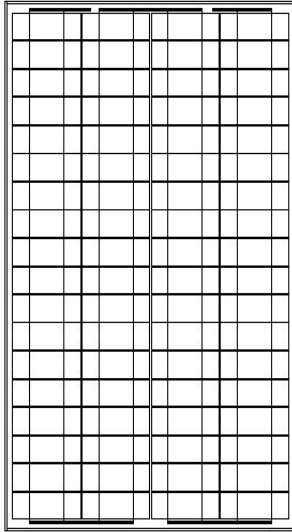

Solar cells: Polycrystalline solar cells

Laminate: Glass /EVA / TPT (tedlar/pet/tedlar) or TPE

Front Side: High-transmission 3.2mm tempered glass

Back Side: TPT /TPE

Frame: Clear anodized aluminum frame

Output : Junction box

Module Type	Pm(Wp)±5%	Vmpp(V)	Impp(A)	Voc(V)	Isc(A)	Module size(mm)	NET(lbs)
DS-A36-130	130	36.0	3.6	44.6	3.94	1390*665*35(mm) 54.7*26.2*1.38(inch)	10.7

Operation Temperature Range: - 40℃ ~85℃


NOCT: 48℃ ±3℃

Temperature coefficients of Im: + 0.1 %/℃

Temperature coefficients of Vm: - 0.38 %/℃

Maximum System Voltage: DC600V

STC: 1000W/m², 25℃, AM1.5

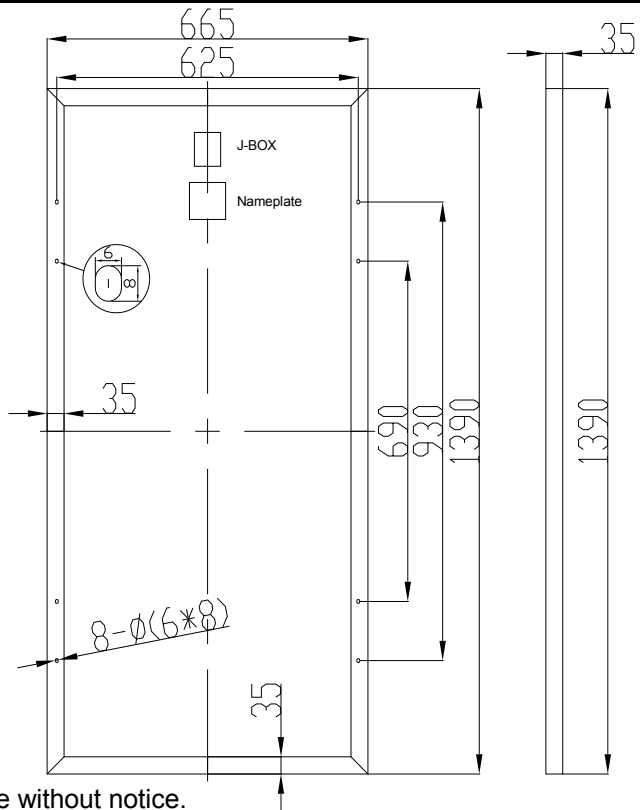

All the data of this sheet are subjected to change without notice.

Anji DaSol Solar Energy Science & Technology Co., Ltd.