


TILE ROOF MOUNTING SYSTEM



Web: www.emperysolar.com

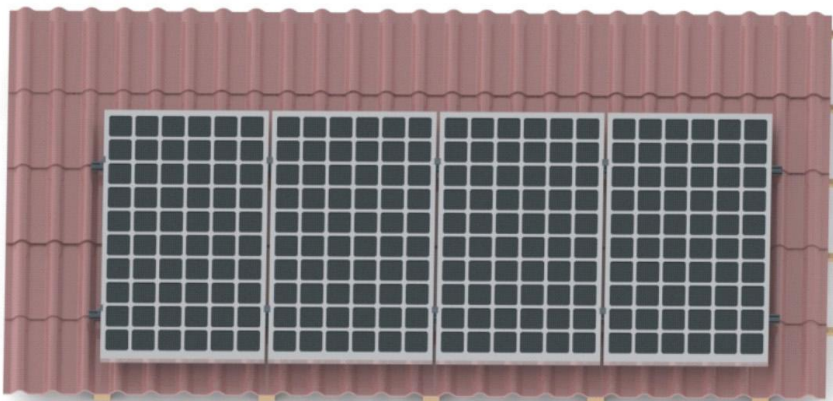


TECHNICAL INFORMATION

Install site	Tile Roof Top
Roof Slope	Up to 60 deg
Building Height	Up to 20 m
Max Wind Speed	60m/s
Snow Load	1.4KN/m ²
Material	A16005-T5 & Stainless steel 304
Color	Natural or Customized
Standard	AS/NZS 1170 and other international Standard




10 YEAR
WARRANTY

20 YEAR
DURATION


INSTALLATION STEPS:

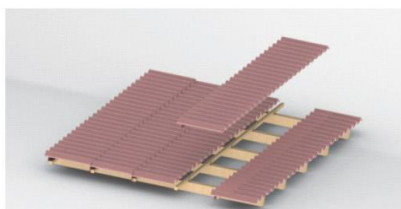

1 Open tile and fix the roof hook to the purlin with self-tapping screws

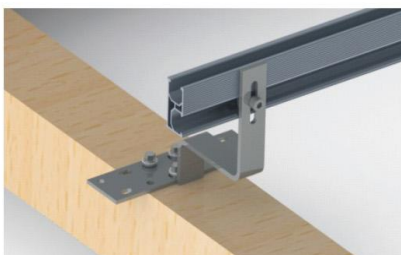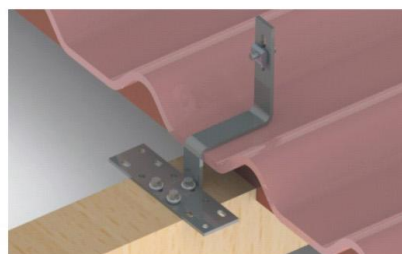

2 Rail Installation

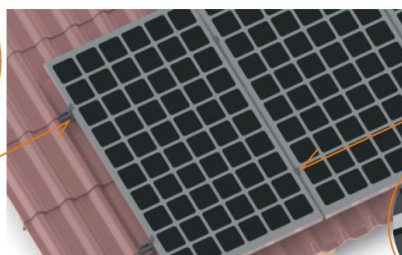

3 Fix End & Mid clamps




Components:

Material:

AL6005-T5 & Stainless steel SUS304

Surface:

Clean Anodized

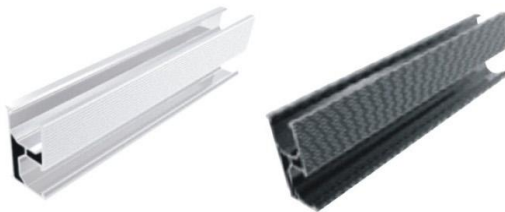

1 Rail 1#

SPECIFICATION

2560mm	3405mm	4200mm	Customized
--------	--------	--------	------------



2 Rail Splice

SPECIFICATION

150mm	200mm
-------	-------



3 Mid Clamp & End Clamp

SPECIFICATION

35mm	40mm	45mm	46mm	50mm
------	------	------	------	------



EPR-TRH-01



EPR-TRH-02



EPR-TRH-03



EPR-TRH-04



EPR-TRH-05



EPR-TRH-06

4 Roof Hooks

Material: Stainless Steel SUS304

Surface: Sandblasted

High Pre-assembled