


All-aluminum Carport Mounting System



A1: Single Row Carport

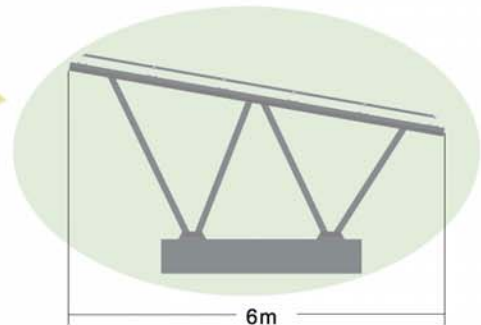

System Introduction

This All-aluminum carport mounting system adopts AL6005-T5, with some parts pre-assembled before delivery, which helps to save onsite installation time and labor cost.

Advantages

- ★ High water resistance.
- ★ Strong Anti-corrosive, light-weight, high intensity.
- ★ To be installed over existing car park, help to economize land utilization.
- ★ Able to manufacture according to customer's design & solution.

Note: Customized design available.

20
years
duration

12
years
warranty

All-aluminum Carport Mounting System

Best Seller

20
years
duration

12
years
warranty

A1: Single Row Carport



Spec.	Descriptions
Tilt Angle	5°~ 20°
Ground Clearance	2000mm
Applicable Module Array	5 or 6 rows
Applicable Foundation	Cement Block
Spacing (N-S)/(E-W)	2000mm/5000mm

A2: Single Row Carport



Spec.	Descriptions
Tilt Angle	5°~ 20°
Ground Clearance	2000mm
Applicable Module Array	4 or 5 rows
Applicable Foundation	Cement Block
Spacing (N-S)/(E-W)	1600mm/5000mm

A3: Double Row Carport



Spec.	Descriptions
Tilt Angle	5°~ 20°
Ground Clearance	2000mm
Applicable Module Array	4 or 5 rows
Applicable Foundation	Cement Block
Spacing (N-S)/(E-W)	2500mm/5000mm